


CLP

CLP-D/CLP-FL/ CLP-NM

Circular Low
Pressure Drop
Silencers

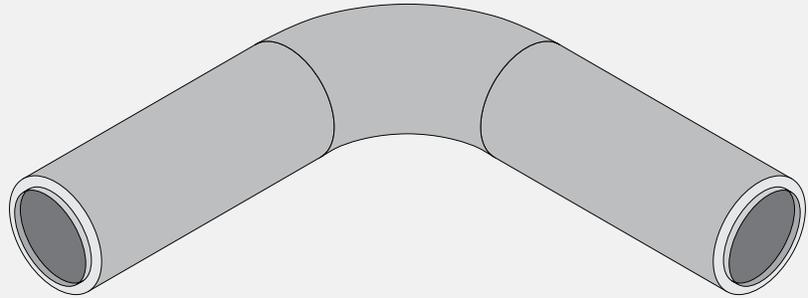

Description

VIBRO-ACOUSTICS' CLP SILENCERS have 100% of the glass fiber or expansion chambers outboard of the airstream. By allowing the silencer outboard dimensions to exceed the duct cross section dimensions, and maintaining internal dimensions equal to the connecting duct dimensions, CLP silencers will have a pressure drop almost equal to empty duct. The difference is only the roughness factor of perforated metal over solid.

CLP silencers can be straight or also include bends and transitions. The most common thickness of acoustic treatment is 4" for noise control. Thicker treatment of 6" or even 8" is more effective in the low frequency range.

CLP-D silencers use acoustic grade glass fiber protected by perforated metal. The thick media provides excellent attenuation if sufficient length is available at virtually no pressure drop. Glass fiber cloth in addition to the perforated metal prevents glass fiber erosion above 4000 fpm for straight ducts and 2000 fpm at elbows and other fittings.

CLP-FL silencers incorporate a film liner between the perforated metal and the glass fiber. CLP-NM silencers do not use glass fiber and are completely void of any fill material.

Applications

- > High duct velocity systems
- > When fan system can not tolerate too much pressure drop
- > Systems with long duct runs
- > When long term energy cost and initial incremental system cost is more important than initial silencing cost
- > To save redesign of equipment room when standard silencers can not fit the space
- > Where break-out or break-in noise is of concern

Features and Benefits

- > Media external to the airstream allows for minimal pressure drop
- > Available in any cross-sectional dimensions to “fit-the-duct”
- > Made in sections to fit ceiling space and can incorporate notch-outs to facilitate cross-over beams, pipes, ducts, etc.
- > Can be selected to suit the acoustic, space, or energy cost requirements
- > Construction quality and aerodynamic design optimized to give reliable performance, best acoustics, lowest pressure drop and lowest overall cost
- > Available in Dissipative (CLP-D), Film Lined (CLP-FL) and No-Media (CLP-NM) options
- > When break-out noise is of prime concern CLP silencers may be appropriate selections. They may require mass/stiffness added to their outer casing. Refer to [Silencer Selection Instructions](#) for proper silencer location.

Cautions/When Not to Use RLP Silencers

- > When there is absolutely no room outside the duct connection size (e.g. tight shafts)

Performance Data/Testing

Vibro-Acoustics’ 5th generation aero-acoustic laboratory was the first laboratory to be NVLAP accredited (Lab Code 100424-0) for the ASTM E-477 silencer test code. NVLAP is administered by the U.S. Dept. of Commerce.

Silencer Selection and Location

RLP and CLP Silencers need to be carefully selected to optimize performance. Call **1-800-565-8401** for custom selections by our application engineers.

Special Construction Options

- > Heavier gauge casings and perforated metal
- > Continuously welded casings
- > Special materials (e.g. stainless steel, aluminum)
- > Flanges
- > Access doors
- > Media protection: glass fiber cloth
- > High transmission loss (HTL) casings to prevent break-out/break-in noise
- > Built-in transitions
- > For details of above and more special options see [Special Construction Options](#).

Standard Construction Features

CLP-D

- > Galvanized, lockformed casing
- > Constructed to SMACNA standards
- > 2" slip connection at each end
- > Perforated galvanized liner matching
- > The inside duct cross sectional
- > Dimensions
- > Acoustic grade glass fiber under
- > Minimum 15% compression with
- > Thickness usually ranging from 2-8"
- > Depending on acoustic performance
- > Required and space available

CLP-FL

- > Galvanized, lockformed casing constructed to SMACNA standards
- > 2" slip connection at each end
- > Perforated galvanized liner matching the inside duct cross sectional dimensions
- > Acoustic grade glass fiber under minimum 15% compression with thickness usually ranging from 2-8" depending on acoustic performance required and space available
- > Glass fiber carefully wrapped in Tedlar film with lap joints away from perforated metal edges to reduce potential tearing of the Tedlar
- > 0.5 inch deep corrugated honeycomb "stand-off" spacer sheet placed between the perforated metal and the film

CLP-NM

- > Galvanized, lockformed casing constructed to SMACNA standards
- > 2" slip connection at each end
- > Special "tuned" perforated galvanized liner matching the inside duct cross sectional dimensions
- > "Tuned" chambers external to the duct cross sectional dimensions no acoustical media